




YDS2458PT10VH-6N(F) 2400-2500/5150-5850MHz 10/13dBi 6x6 MIMO Panel Antenna




Specifications


Antenna Model No.	YDS2458PT10VH-6N(F)
Frequency Range	2400-2500/5150-5850MHz
Polarization	Horizontal(4x) + Vertical(2x)
Gain	10dBi(2.4GHz) / 13dBi(5GHz)
VSWR	≤ 2.0
Horizontal Bandwidth	(2.4GHz) 45°, (5GHz) 40°
Vertical Beamwidth	(2.4GHz) 32°, (5GHz) 22°
Port-to-Port Isolation	$\leq 28\text{dB}$
Nominal Impedance	50 Ω
Maximum Power	50W
Lightning Protection	DC Ground
Connector	6x N-Female
Mounting Mast Size	$\Phi 30$ - 50mm
Dimensions	305x305x20mm
Weight	1.6 kg
Radome Material	UV-ABS
Max. Wind Velocity	210km/h
Operating Temperature	-40~+60°C



YDS2458PT10VH-6N(F)
2400-2500/5150-5850MHz 10/13dBi 6x6 MIMO Panel Antenna

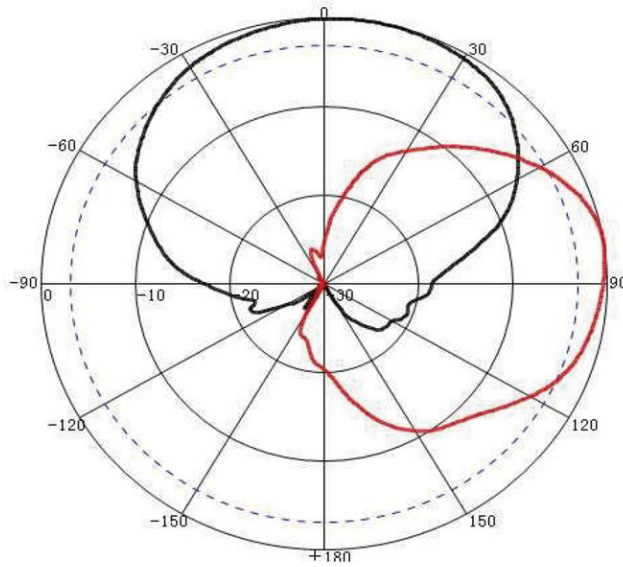

2.4GHz

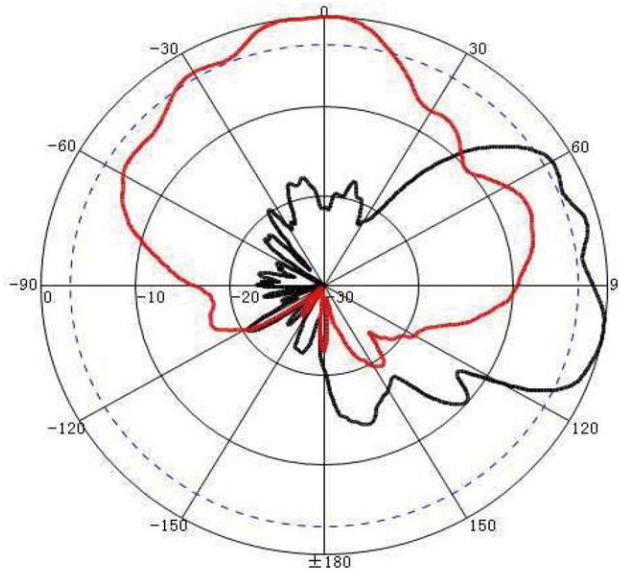

5GHz